


INSTALLATION SHEET

CASSETTE BAND BRAKE ADJUSTMENT

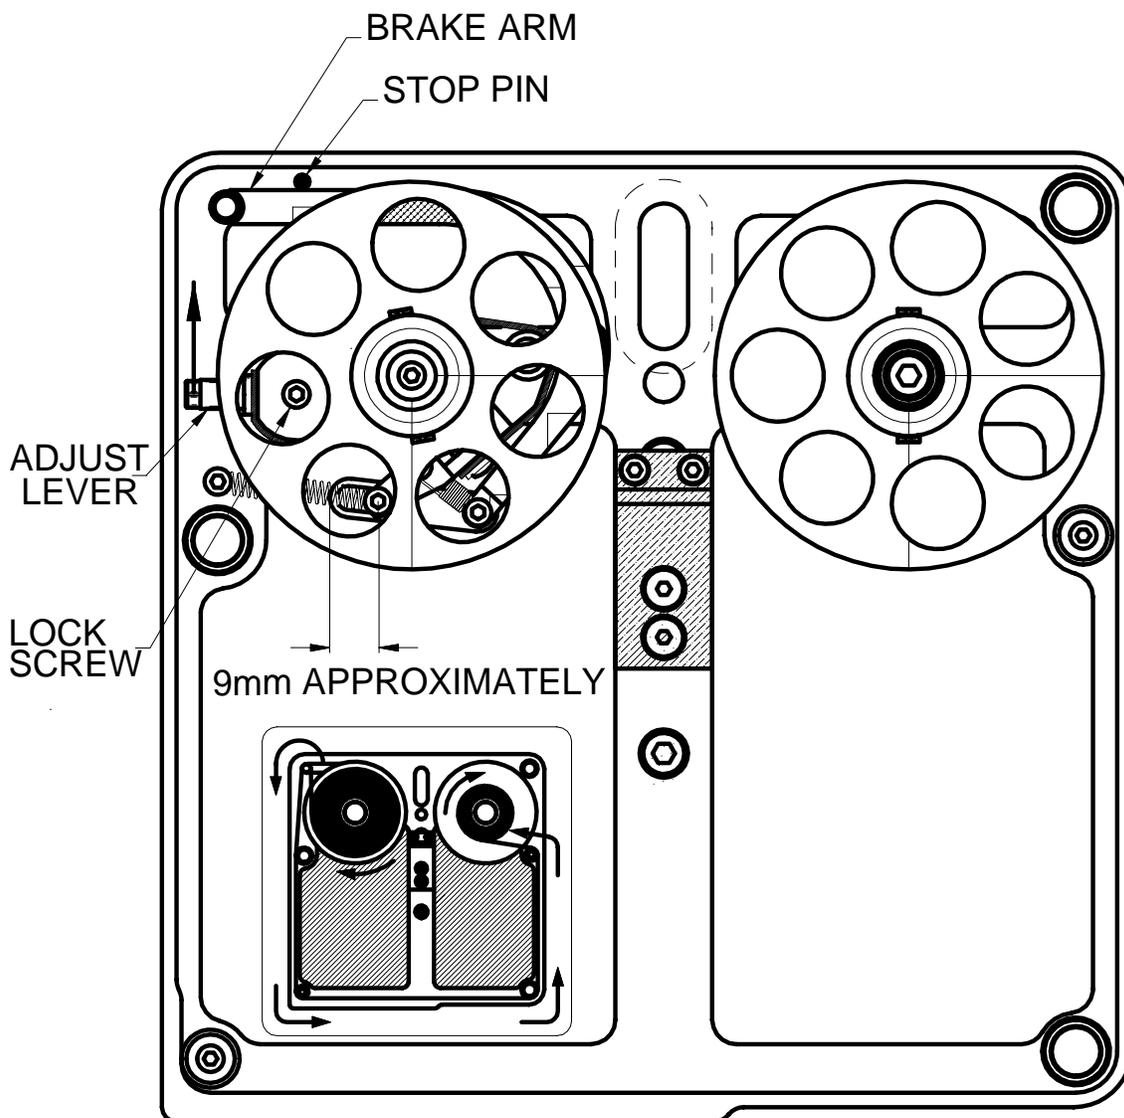

1. Release LOCK SCREW
2. Adjust LEVER upwards until the BRAKE ARM just moves away from STOP PIN, release pressure so Brakearm just touches STOP PIN, release pressure slightly and then tighten LOCK SCREW.
3. Ensure that the BRAKE ARM always locates to STOP PIN.
4. The dimension shown above is a guide for setting.

ISSUE 2	DATE 13/11/97	TITLE CASSETTE BAND BRAKE ADJUSTMENT	
DRAWN CC	CHECKED	SCALE 1 : 1	PART NO. REF 757006
OPEN DATE EQUIPMENT LTD			